

DATASHEET

XS4 One S Keypad Euro

The XS4 One Surface keypad enabled door lock combines the latest compatible credentials technology with a dynamic advanced PIN management, offering multiple access methods for online and standalone situations.

Easy to install design makes the XS4 One S Keypad an easy solution to be combined with the delivered or the existing lock.



TECHNICAL DATA:

| | |
|---|--|
| Reader dimensions : | 290 x 67 x 20 mm |
| Weight: | 2.5 kg |
| Handle rotation: | Max. 52° |
| Door thicknesses: | 32 mm - 120 mm |
| Distance from the handle to the cylinder | 62 - 110mm |
| Square spindles: | 7mm, 7.6mm split, 8mm, 8mm split, 9mm and 9 mm split |
| Keypad Touch Screen: | 12 capacitive keys |
| Power source: | 3 AA batteries (LR6 1,5V) |
| Number of openings¹: | MIFARE: 91.000 to 103.500 JustIN: 91.000 to 119.000 Keypad: 11.600 to 14.100 |
| Maximum events on lock audit: | 1.625 (Salto Space) 1.280 (Salto KS - Salto Homelok) |
| Environmental conditions: | +0 °C / +50 °C. without condensation. |
| IP class: | Not suitable for outdoor use. |
| Certifications: | CE, FCC, IC, RCM, UKCA, UK-PTSI, NOM, MIC, TDRA, SRRC, KCC, IMDA, EAC, ICASA, CRA, NCC, UL10C/AS1530.4/EN1634-1(EI60 Wood door 54mm)/ANSI/BHMA A156.25 & A156.13 |

¹Depending on the platform and the card technology.

OPENING MODES:

| | |
|----------------------------------|-----|
| Standard: | • |
| Passcode/PIN/Keypad code: | • |
| PIN+Card: | • |
| Office: | • |
| Automatic opening: | • |
| Toggle: | • |
| Amok: | — * |
| Exit leaves open: | • |

* Not available yet.


CREDENTIAL TECHNOLOGIES:

| | |
|---|---|
| JustIN Mobile Credentials¹: | • |
| NXP MIFARE²: | • |

¹Bluetooth Digital Key and Near Field Communication (NFC) capability.

² MIFARE® DESFire® EV1/EV2/ EV3, MIFARE® Plus, MIFARE® Ultralight C, MIFARE® Classic.

TECHNICAL DRAWING:

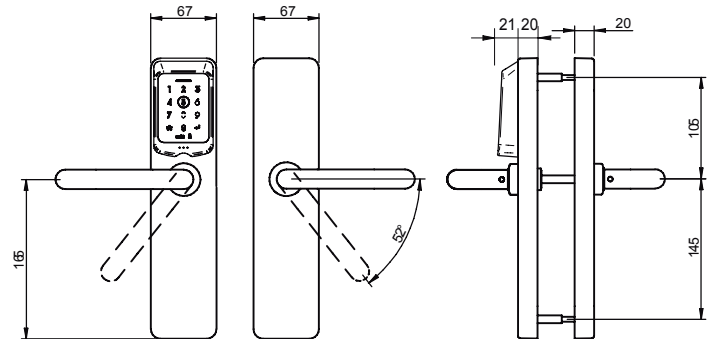

SALTO PLATFORMS:



| | | | |
|-------------------------|---|---|---|
| SVN data-on-card | • | — | • |
| JustIN Mobile | • | • | • |
| BLUEnet Wireless | • | • | • |
| Apple Wallet | — | — | • |

¹Salto Space. On-premise access control platform

²Salto KS. Cloud-based access control platform

³Salto Homelok. Cloud-based access control platform

FINISH:

| | |
|---|---|
| IM Satin Stainless - BHMA630 US32D | • |
| IP Polished Stainless - BHMA629 US32 | • |
| PM PVD satin brass type - BHMA731 US4 | • |
| PP PVD bright brass type - BHMA724 US3 | • |
| NE Black chromium - BHMA687 | • |
| DB PVD Dark Bronze - BHMA640 US10B | • |
| BC BioCote anti-microbial | • |

READER FINISH:

| | |
|---------------|---|
| Black: | • |
|---------------|---|

HANDLES:

| | |
|----------------------------|--|
| Compatible handles* | B, G, H, J, K, L, N, O, P, S, T, U, W, Y, Z, 2, 3, 4, 5, 7 |
|----------------------------|--|

* Not all the handles are available in all finishes.

LOCKS:


| | |
|-----------------|---|
| Euro: | • |
| Tubular: | • |

Salto Systems.

Get in touch with our team.

Give us a brief summary of your needs, your next project and we'll get back to you.

Spain, UK, France, Germany, Switzerland, The Netherlands, Belgium, Poland, Slovakia, Slovenia, Czech Republic, Denmark, Norway, Sweden, Finland, Italy, Portugal, US (NYC - Atlanta - LV), Canada, Mexico, Costa Rica, Colombia, Puerto Rico, Chile, UAE, India, South Africa, Singapore, China, Hong Kong, Korea, Vietnam, Australia, New Zealand.

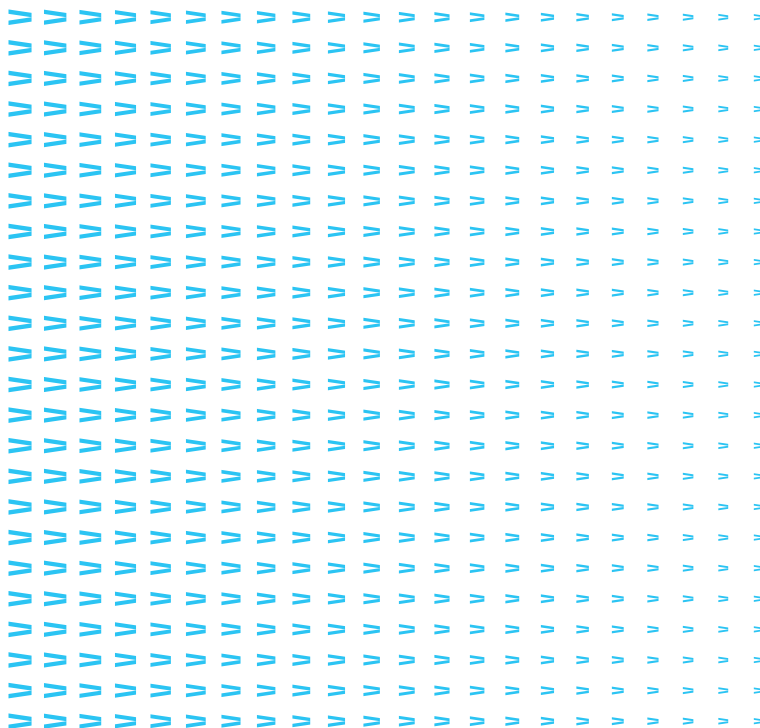

**TECHNICAL SPECIFICATIONS -
DATASHEET-SALTO-XS4-ONE-S-KEYPAD-EURO-EX9XX-ENG-01-25**

—
Copyright © 2025 Salto Systems

Salto Systems reserves the right to modify technical specifications, designs and performance without notice.